


Features & Benefits

- maximum density space saving unit
- accepts a wide variety of industry standard protection modules
- user-friendly front facing cross connect field and test blocks
- unit marked for easy pair identification
- large, well-spaced fanning strips allows for clean jumper wire management.
- quick release system on rear cover allows for access to panel field for wirewrap input

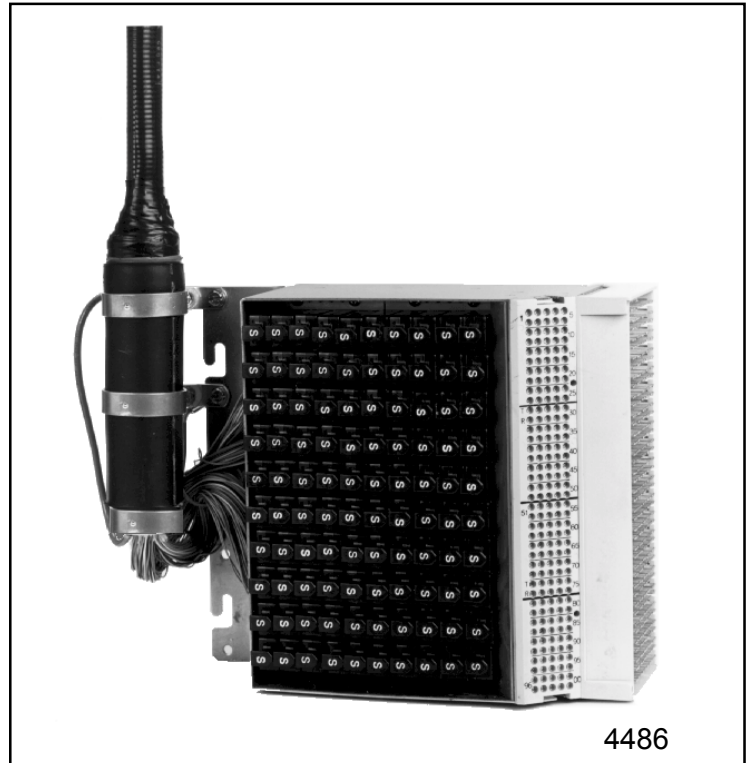

4486

Ordering Information

Model No.	Order No.	Stub Direction	Input	Output	Dimensions (H" x W" x D")	Weight (lbs)
4486	611001	stubless	-----	IDC connector	8.57 x 4.45 x 10.4	7
4486	622001	stubless	-----	Wire Wrap	8.57 x 4.45 x 10.4	7
4486	611012A30	bottom	30 ft. 24 AWG shielded stub	IDC connector	8.57 x 4.45 x 10.4	19
4486	622012A30	bottom	30 ft. 24 AWG shielded stub	Wire Wrap	8.57 x 4.45 x 10.4	19
4486	611002A30	top	30 ft. 24 AWG shielded stub	IDC connector	8.57 x 4.45 x 10.4	19
4486	622002A30	top	30 ft. 24 AWG shielded stub	Wire Wrap	8.57 x 4.45 x 10.4	19

Note: Various cable gauges and lengths are available upon request.
Protection modules ordered separately.



Central Office Connectors

4486 Series

